

(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 969 399 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
05.01.2000 Bulletin 2000/01

(51) Int Cl.7: G06F 17/60, G06F 17/40

(21) Application number: 99305075.6

(22) Date of filing: 28.06.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

- Stern, Edith H.
Winchester, Hampshire SO21 2JN (GB)
- Willner, Barry E.
Winchester, Hampshire SO21 2JN (GB)

(30) Priority: 30.06.1998 US 107389


(71) Applicant: International Business Machines
Corporation
Armonk, NY 10504 (US)

(74) Representative: Davies, Simon Robert
IBM,
United Kingdom Limited,
Intellectual Property Law,
Hursley Park
Winchester, Hampshire SO21 2JN (GB)

(72) Inventors:
• Lee, Peter S.
Winchester, Hampshire SO21 2JN (GB)

(54) **Multimedia system and method for automatic clip selection**

(57) A multimedia search and indexing system automatically selects scenes or events of interest from any media, i.e., video, film, sound for replay, in whole or in part, in other contexts. The entire audio track of a recorded event in video, film, sound, etc., is analyzed to determine audio levels within a set of frequency ranges of interest. Audio clip levels within the selected frequency ranges are chosen as audio cues representative of events of interest in the track. The selection criteria are applied to the audio track of the recorded event. An Edit Decision List (EDL) is generated from the analysis of the audio track. The list is representative of scenes or sounds of interest as clips for reuse. The clips are reviewed and accepted or rejected for reuse. Once selected, the clips are edited using industry standard audio and video editing techniques.

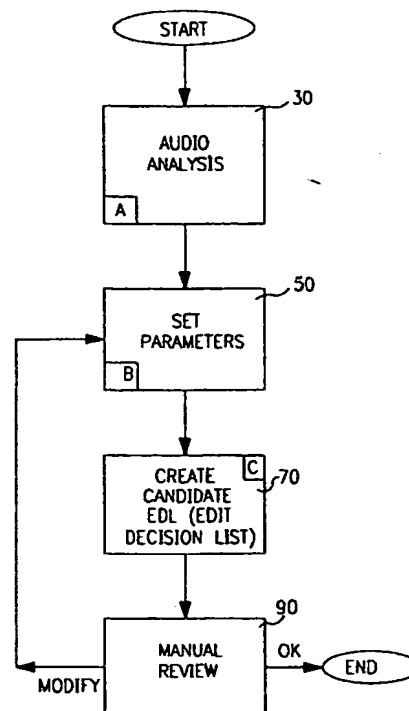**FIG. 3****EP 0 969 399 A2**

Description

[0001] The invention relates to a multimedia system for use in search and indexing to automatically select clips of events for use in another context.

[0002] In managing intellectual property assets for maximum return, it is common in the media industry to re-purpose assets, particularly video and sound recording assets, in whole or in part, into other products. An example of a re-purposed asset would be, for example, a video recording of a sporting event shown on television; a portion later included in a commercial; and multiple clips used for news or highlight recaps of the event as well as in a CD-ROM game. Given the need to maximize asset return, the content owner is faced with the problem of finding the desired sections of video or audio materials within a given asset or assets. This is the case whether the asset is stored in a computer system or on traditional analog media such as magnetic tape or film. The state of the art for identifying events for re-purposing is automatic scene change detection. This technology identifies the first frame of a scene that is dramatically different than the preceding scene. However, changes of scene may not be well correlated with the section of media that is desired for re-purposing. For example, in a fast moving game like hockey, the events, such as a goal scored or goal missed, or a key player returning to the ice, may not constitute a change of scene.

[0003] What is needed is a mechanism for automating the selection of scenes of interest in an event in one context for re-purposing in another context in which the selected events correlate with the scenes and sounds and context of another media product.

[0004] Prior art related to re-purposing intellectual property includes the following:

[0005] USP 5,713,021 issued January 18, 1998 and filed September 14, 1995, discloses a multimedia system which facilitates searching for a portion of sequential data. The system displays neighboring data depending on a requirement when displaying the portion of the data. A view object management means searches view objects stored in a view object storage means depending on a specification of features of a portion of that data. A display/reproduction means displays and reproduces a portion of data corresponding to the view searched by the view object means.

[0006] USP 5,613,032 issued March 18, 1997, and filed September 2, 1994, discloses a system for recording and playing back multimedia events and includes recording sources, a preprocessor, a delivery processor, and user control units. The system records and plays back multimedia events which entails capturing tracks of various aspects of a multimedia event; coding the tracks into digitized blocks; time stamping each block; and compressing and pre-processing each track as instructed in a source mapping table; transmitting tracks of the multimedia event to the user as requested; and

adjusting the delivery track based upon relative time information associated with the new position established after search through a track of the multimedia event.

[0007] USP 5,621,658 issued April 15, 1997, and filed July 13, 1993, discloses communicating an electronic action from a data processing system via an audio device. At the sending data processing system, an action is converted to a pre-determined audio pattern. The action may be combined with text converted into an audio message and contained in an electronic mail object. The audio patterns are then communicated to the audio device over telephone lines or other communication means. At the receiving end, the audio device records the object. A user can provide the recorded object to a data processing system which then executes the action and converts the text audio patterns back to text. In addition, the action can be converted to text and displayed on the data processing system.

[0008] The present invention provides a multimedia system for automatic selection of clips recorded in a media for replay in other contexts, comprising:

means for selecting at least one frequency range for examination;

means for determining the audio level for a time interval within the at least one selected frequency range;

means for automatically assessing the determined audio level against at least one selection criterion; and

means for generating a list of candidate clips based on those time intervals for which the determined audio level satisfies said at least one selection criterion.

[0009] The preferred embodiment further comprises:

means for selecting analysis time intervals; and
means for recording the selected frequency range, determined audio level, and an index for each analysis time interval;
and wherein said automatic assessment means utilizes the recorded frequency range and determined audio level for each analysis time interval.

[0010] Thus the results from analysing a multimedia source can be recorded, and the recorded results used subsequently as the basis for locating desired clips. Note that the recording should be performed at as a high a time and frequency resolution as possible, to ensure that the maximum information is available for this later analysis. An alternative approach is to perform the whole operation on the fly, in other words to calculate the audio signal parameters each time clips having certain properties are required.

[0011] In a preferred embodiment, said at least one selection criterion comprises whether or not the audio level exceeds a clip threshold in a frequency range (this

can be used to look either for very loud or for very quiet passages), and the system preferably includes means for setting parameters by frequency range as threshold levels for clips of interest. However, other criteria, such as looking at the rate of increase in audio level, or for more complex relationships between different frequency and/or timing intervals can also be used. For example, the at least one selection criterion may involve the logical combination of audio levels from two or more frequency ranges (eg simultaneously quiet at low frequency, and loud at high frequency). It is also possible to combine time intervals which overlap or are contiguous to form a candidate clip (for example, if the audio levels are calculated at 1 second intervals, then these can be combined to search for five or ten second clips).

[0012] It is preferred that said list of candidate clips comprises an Edit Decision List (EDL), and said system further comprises means for selecting clips from the Edit Decision List for replay. These can then be further edited and reviewed, to determine manually which of the candidate clips are most appropriate.

[0013] The system preferably further comprises means for generating a start and end time code for the selected clips in the list of candidate clips. Although these codes could be simply taken from the analysis time intervals, the system preferably allows preceding and succeeding time periods to be specified, which can then be subtracted from/added to the candidate time interval as appropriate (nb if this expanded clip extends beyond the start or end of the media passage itself, then the start/end of the clip can be modified accordingly).

[0014] It is further preferred that the system also comprises means for modifying the at least one selection criterion for selection of other clips of interest in the media. This may be useful for example if a previous search was too broad, resulting in too many candidate clips for manual review.

[0015] The invention further provides a method for the automatic selection of multimedia clips recorded in a media for replay in other contexts, comprising:

selecting at least one frequency range for examination;
determining the audio level for a time interval within the at least one selected frequency range;
automatically assessing the determined audio level against at least one selection criterion; and
generating a list of candidate clips based on those time intervals for which the determined audio level satisfies said at least one selection criterion.

[0016] The invention further provides a multimedia search and indexing system for use in a signal processing system including a signal generator, a processor and memory, for automatic selection of scenes or sounds recorded in a media for replay in other contexts, comprising:

means for analyzing the media for audio levels within a set of frequency ranges;
means for setting audio clip levels as audio cues for identifying a scene of interest in the media in the set of frequency ranges; and
means for generating a list of candidate scenes matching the audio cues in the frequency ranges.

[0017] A preferred embodiment further comprises: (1) means for modifying the audio clip levels and/or frequency ranges for selection of other scenes or sounds of interest in the media; (2) means for relating time codes to audio cues in the media for selection of scenes of interest; and (3) means for logically combining audio cues in different frequency ranges for selection of a scene or sound of interest in the media.

[0018] Viewed from another aspect, the invention provides a multimedia search and indexing system for automatic selection of scenes or sounds recorded in a media for replay in other contexts, comprising:

(a) means for selecting analysis intervals in the media;
(b) means for selecting desired frequency ranges for examination;
(c) means for recording the frequency range, audio level, and an index for each analysis interval;
(d) means for automatically comparing recorded audio level for a selected interval versus a clip level in a frequency range and generating an Edit Decision List (EDL); and
(e) means for selecting clips from the Edit Decision List for replay.

[0019] Such a system preferably further comprises: (1) means for setting parameters by frequency range as clip levels for scenes or sounds of interest; (2) means for modifying the parameters and generating a revised Edit Decision List (EDL) for selection of different clips for replay; and (3) means for generating a start and end index for the selected clips in the EDL.

[0020] Viewed from another aspect, the invention further provides in a multimedia search and indexing system including a processor, audio analysis means, and selection means for scenes or sounds in a media, a method for automatic selection of scenes or sounds recorded in the media for replay in other contexts, comprising the steps of:

(a) selecting desired frequency ranges in the media;
(b) determining a number of scene or sound intervals;
(c) recording the frequency range, audio level and an index for each scene or sound interval;
(d) automatically comparing the recorded audio level for a selected interval versus an audio clip level in a frequency range and generating an Edit Decision List (EDL); and

(e) selecting clips from the Edit Decision List (EDL) and editing the selected clips for replay.

[0021] Preferably the method further comprises the steps of: (1) generating a start and end time code for the selected clips in the EDL; and (2) setting audio parameters by frequency range in the processor as audio cues for scenes of interest from the selected intervals.

[0022] Viewed from a further aspect, the invention provides in a signal processing system including a multimedia search and indexing system for automatic selection of scenes or sounds recorded in a media for replay in other contexts, a method for analyzing the media for a set of frequency ranges of interest for replay, comprising the steps of:

- (a) selecting desired frequency ranges of interest in the media as indicative of a scene or sound of interest;
- (b) selecting the granularity or length of the selected frequency ranges;
- (c) determining the number of analysis intervals on the media;
- (d) filtering the media for the desired frequency ranges;
- (e) measuring the audio level for the selected frequency ranges in each interval; and
- (f) recording the interval, frequency range, and audio level.

[0023] Viewed from a further aspect, the invention provides in a signal processing system including a multimedia search and indexing system for automatic selection of scenes or sounds recorded in a media for replay in other contexts, a method for setting audio clip levels in analyzing the media for a set of frequency ranges of interest for replay, comprising the steps of:

- (a) selecting an audio clip level for each frequency range as indicative of a scene or sound of interest in the media;
- (b) selecting a time interval in seconds leading an audio level exceeding the clip level;
- (c) selecting a time interval in seconds following the exceeded audio clip level;
- (d) repeating steps (a), (b), and (c) for each frequency range; and
- (e) recording and relating each scene of interest exceeding the audio clip level to the index in the media.

[0024] Viewed from a further aspect, the invention provides in a signal processing system including a multimedia search and indexing system for automatic selection of scenes or sounds recorded in a media for replay in other contexts, a method for generating an edit list of candidate scenes or sounds of interest in the media for replay based upon audio cues in different audio

frequency ranges comprising the steps of:

- (a) comparing recorded audio levels in different frequency ranges of the media with set audio clip levels indicative of a scene or sounds of interest in the media;
- (b) recording the index as a time code for the scene or sound exceeding the audio level in the frequency range in an Edit Decision List (EDL);
- (c) subtracting a time interval P in seconds preceding a time code for the index (TC) obtained in step b;
- (d) replacing (TC-P) with time code for start of media, if (TC-P) is before the start of the media;
- (e) adding a time interval F in seconds to TC in step (d) to obtain (TC+F);
- (f) replacing (TC+F) with end of media if (TC+F) is greater than the end of the media;
- (g) recording the media from (TC-P) to (TC+F) in EDL; and
- (h) repeating steps (a) - (g) for each frequency and record in the EDL for each time code indicative of a scene of interest.

[0025] It is preferred that the method further comprises the step of combining the intervals which overlap or are contiguous to form a new EDL. It is further preferred that the step of comparing recorded audio levels in different frequency ranges of the media is for audio clip levels greater than a threshold or greater than or equal to a threshold as indicative of a scene or sound of interest in the media.

[0026] Another possibility is for the step of comparing recorded audio levels in different frequency ranges of the media to be for audio clip levels equal to or less than a threshold as indicative of a scene or sound of interest in the media. A still further possibility, this time somewhat more complex, is for the step of comparing recorded audio levels in different frequency ranges of the media to have audio clips levels less than a threshold for a set of frequency ranges and audio clip levels greater than a threshold for another set of frequency ranges, where both frequency ranges are indicative of scenes or sounds of interest (NB audio levels equal to the threshold may be selected or not selected as desired).

[0027] Using the approach described above, intellectual property, e.g., video and sound, can be repurposed by automatically selecting certain events or sound in one context from a multimedia source (film, video, audio etc.) for use in or with another context, where the selected events correlate with the scenes and sounds in or with the other context.

[0028] This allows the selection of scenes of interest in an event in one context for incorporation in, or with another context, as a new or modified product. The automatic selection and correlation of scenes of interest in one context, for incorporation in or with another context, as a new or modified product, can be performed using audio cues and signal level thresholds for such

selection and correlation. Different audio cues can be logically combined in selecting scenes of interest in one context for use in different contexts.

[0029] In a preferred embodiment, an Edit Decision List is created identifying scenes of interest selected in one context for use in another context using audio cues and signal thresholds. The "start" and "stop" times are generated in the Edit Decision List.

[0030] Thus the entire audio track of a recorded event in video, film, sound, etc., may be analyzed to determine audio levels or cues within a set of frequency ranges of interest. The frequency ranges indicate different sounds, e.g. a referee whistle; loud shouting or clapping; a bell sound, etc., each sound having a distinctive frequency and indicative of a scene of interest which correlates with a highlight in an event when occurring at a defined audio clip level. Alternatively, the sound level may drop dramatically as indicative of a scene of interest. Multiple frequency ranges may be analyzed for audio cues in refining the identification of a scene of interest. An Edit Decision List (EDL) of scenes of interest is generated from the analysis of the audio track in which the frequency ranges and audio levels match the criteria for a scene of interest. The list includes "start" and "stop" times related to the time codes in the track of the media for locating the scenes of interest as a visual clip. The visual clips may be reviewed and accepted or rejected for re-purposing. Once selected, the visual clips can be edited using industry standard audio and video editing techniques.

[0031] A preferred embodiment of the invention will now be described in detail by way of example only with reference to the following drawings:

Figure 1A is a block diagram of a system for multimedia searching and indexing using audio cues and signal level thresholds in accordance with the present invention;

Figure 1B is an alternative version of certain components of the system of Figure 1A;

Figure 2 is a representation of a visual tape and accompanying sound track indicating events of interest for re-purposing in another context as a new or modified product;

Figure 3 is a flow diagram of a selection process for scenes of interest in the visual media of Fig. 2 using the system of Figure 1A or B;

Figure 4 is a flow diagram of an audio analysis conducted in the process of Figure 3;

Figure 5 is a flow diagram for setting audio parameters for selection of scenes of interest in the process of Figure 3;

Figure 6 is a flow diagram for creating an Edit Decision List (EDL) in the process of Figure 3; and

Figure 7 is a reproduction of an Edit Decision List (EDL).

[0032] In Figure 1A, a system 10 is shown for auto-

atically identifying and selecting scenes or sounds of interest in a media using audio cues and signal level thresholds for re-purposing the media. The system includes a means of listening to or viewing source material on a tape transporter 11, such as a conventional tape drive or other equipment in which a visual or sound media 12, e.g. film, video disk, compact disk is loaded and moved back and forth according to an editor's needs in selecting scenes or sounds of interest for re-purposing. An analog signal on the tape is transferred to an analog/digital converter 13 for conversion into a digital counterpart by well-known methods, e.g., pulse amplitude modulation. A digital signal on the tape or the converted analog signal is provided to a programmable digital filter 14. The programmable digital filter 14 is responsive to the digital signal in conjunction with a digital filter program 15 stored in a random access memory 16. The digital filter program 15 in conjunction with the filter 14 selects frequency ranges in the analog signal of interest to an editor. The memory 16 is coupled through a system bus B to a system processor 18, a display 19, and a storage disk 20. The memory also includes a standard operating system 17, an analysis program 21 for identifying scenes of interest in the media 12; a parameter setting program 22 for automatically setting audio levels or cues representative of scenes of interest in the media 12; and an edit decision list program 23 which provides "start" and "stop" time codes in the media for scenes of interest as a basis for an editor to select a scene, display it on the monitor 19, and incorporate the scene into a modified or new product using conventional editing processes. The analysis program 21, parameter setting program 22, and edit decision list program 23 will be described hereinafter in more detail.

[0033] In Fig. 1B an alternative system for multimedia searching and indexing using the analysis program 21, parameter setting program 22 and edit decision list program 23 includes a standard video tape recorder 11' and a standard oscilloscope 14' as substitutes for the transporter 11, A/D converter 13 and programmable filter 14 in providing the audio signal from the media 12 to the system bus B for processing in the manner to be described hereinafter for both Figs 1A and 1B.

[0034] As an illustrative example of re-purposing, Figure 2 shows an event of interest, for example an American football game, as recorded on a videotape 20 and containing a video clip 21 having scenes of interest for re-purposing in another context; for example, the clip 21 contains scenes of a touchdown 22 and an interception 24. The tape 20 includes a soundtrack 26 which records the sound levels accompanying the scenes. The taped scenes and soundtrack are accompanied by time codes 28 included in the tape. The time codes are industry standard time codes used to navigate the tape. The sound signal levels are selected for a clip level or threshold 29 based on past experience. Signal levels exceeding the threshold are used to identify a scene for re-purposing as will be described in conjunction with Figures

3-6.

[0035] In another embodiment, sound levels equal to or less than a threshold may be indicative of a scene or sound of interest. For example when a factory shuts down and the power equipment stops running, a dramatic drop in sound would occur indicative of a scene or sound of interest. However, for purposes of the present description, the cases of sounds exceeding a threshold will be described.

[0036] In Figure 3, the entire audio track under investigation is first analyzed to determine the audio levels within a set of frequency ranges of interest in a step 30. An editor selects desired frequency ranges and analysis granularity. Analysis granularity refers to the length of intervals to be examined. For example, a granularity of one second means that each second of media will be analyzed separately. For some applications, the granularity of an analysis may be preset. Frequency ranges may be set to recognize things such as applause, the roar of crowds, the blowing of a whistle, etc.. Certain of these ranges are representative of highlights in the event recorded in the tape. For each frequency, each time interval is analyzed and the audio level and time code recorded. When all frequencies have been analyzed for each time interval, the analysis is complete.

[0037] In a step 50, selection criteria are chosen, such as audio clip levels within frequency ranges. The parameters are selected for scenes of interest which correlate to the highlight(s) in an event. For each desired frequency range, several parameters are chosen, including the audio level at which scenes are to be selected, and two time parameters, "P" and "F", where "P" represents the number of seconds preceding the attainment of a threshold level which are to be included in a candidate clip for re-purposing, and "F" represents the number of seconds following the attainment of the clip level which are to be included in the candidate clip. The candidate creation parameters are basic for the selection of the scenes of interest. Other selection criteria, such as total time desired for the aggregation of all candidate clips and more complex relations between the frequencies may also be chosen. Aggregation criteria may also be used, e.g. Exclusive OR, AND, and/or relations between the attainment of audio clip levels within different frequency ranges.

[0038] In a step 70, the selection criteria in step 50 are applied to the results of the analysis done in step 30 and result in a candidate Edit Decision List (EDL). In step 70, for each analysis interval and frequency range desired, the recorded audio level is compared with the parameters obtained from the step 50. The comparison generates candidate time codes for inclusion in the EDL. The list of time codes is then decomposed into a set of intervals representing the candidate clips. As shown in Figure 7, each clip is represented by a "start" and "end" time code.

[0039] In a step 90, an editor can use the "start" and "end" time codes to navigate into an appropriate portion

of the media and examine the candidate clips including the audio. The editor may choose to modify the parameters and generate alternate lists of candidate clips depending on the acceptability of the selection.

[0040] Other audio cues may be used to further refine the selection of the EDL. For example, if action is desired, the video may be analyzed for motion, and this analysis cross-referenced with the audio analysis. Another example would cross-reference fixed text word recognition with the analysis. In this case, recognition of words such as "touchdown" and "interception" within a given time range could be used to validate the appropriateness of candidate video clips. In such case, the EDL can reflect which key words have been observed with which clip.

[0041] Now turning to Figure 4, the audio analysis of step 30 will be described in more detail. In Figure 4, an audio analysis is started in a step 41 in which an editor selects desired frequency ranges (F) to identify scenes of interest in the soundtrack, such as applause, the roar of the crowd, blowing of a whistle, etc.. Typically, these ranges are of the order of ten times the amplitude of the steady-state sound level. The duration of the sound of interest can range from less than one second in the case of bullet shot or tens of seconds in the case of the roar of the crowd responding to a sporting event.

[0042] In a step 42, an editor selects an analysis granularity or time-length of intervals in seconds (S) for examination. For example, a granularity of 1 second means that each second of media will be analyzed separately. With some applications, the granularity of analysis may be preset. In step 43, the time length (G) of the event on the tape to be analyzed is determined, and in step 44, the editor calculates the number of analysis intervals by the relation G/S . For each interval, the corresponding time code and audio level are recorded for each frequency. In step 45, the media is moved to the time code for the first analysis interval, and in step 46, the soundtrack is filtered for the desired frequency ranges using the system of Fig. 1A or B. For each frequency range the audio level is measured in a step 47.

[0043] The interval, frequency range, audio level and time code are recorded for subsequent use in step 48. The tape is moved to the time code for the next interval in a step 49 and the process is repeated until a test 50 indicates the last interval has been analyzed at which time the analysis ends.

[0044] The process of setting parameters for the selection of scenes of interest by audio cues is described in more detail in Figure 5. The process is started in a step 51 in which the editor selects a first frequency range for setting parameters to identify scenes of interest.

[0045] In step 52, the editor selects the audio clip level (A) at which scenes are to be selected for the first frequency range. In step 53, the editor selects a time interval (P) in seconds preceding the audio threshold event for the frequency range being investigated, and in step 54, the editor selects a time interval (F) in seconds fol-

lowing the audio threshold event for the selected frequency range. In step 55, the next frequency range is selected. In a test 56, the process returns to step 52 if the last frequency range has not had parameters assigned. The process for setting parameters for the selection of scenes of interest ends when the last frequency range has been classified.

[0046] The process of creating candidate scenes for the EDL is further described in Figure 6 in which the recorded audio levels are compared with the parameters set in Figure 4 to generate candidate time codes for inclusion in the EDL for each analysis interval and desired frequency range.

[0047] The process for creating the EDL is started in step 71 in which the media is set for the first interval. In step 72, the first frequency range of the first interval is provided to a comparator in a step 73 in which the recorded audio level is compared with the target audio clip level.

[0048] A test 74 is performed to determine whether the audio clip level has been reached. A "no" condition moves the program to entry point A which will be described hereinafter. A "yes" condition indicates that this interval contains an audio level in a frequency range which has exceeded the audio clip level or signal threshold and represents a scene of interest. The associated time code (TC) in the interval containing the scene of interest is recorded in the EDL in a step 75.

[0049] In step 76, the parameter P is subtracted from the first interval and a test 77 is performed to determine if the time of the time code minus P is less than the time code for the start of the media. A "yes" condition initiates a step 78 to replace the time code minus the parameter P for the analyzed interval with the time code for the start of the media, after which the program moves to step 79. Similarly, a "no" condition moves the program to step 79 in which the interval from time (TC - P) to the time code (TC) is entered in the EDL for the first analysis, after which, a step 80 adds the F interval to the time code recorded in the EDL for the frequency range analyzed in the first interval.

[0050] A test 81 is performed to determine if the time code for the event recorded in the EDL + the F parameter exceeds the time code for the end of the media. A "yes" condition initiates a step to replace the time code of the recorded event + the F parameter with the time code for the end of the media, after which the program moves to a step 83. Similarly, a "no" condition moves the program to the step 83 in which the interval time code + the F parameter is recorded in the EDL as the stop code for the event of interest.

[0051] In step 84 the program is set for the next frequency in the interval. Step 84 is also the entry point for node A in which frequencies which do not exceed the audio clip level are returned for analysis of the subsequent frequency range. A test 85 determines if the last frequency range has been completed for the interval. A "no" condition moves the program to entry point B which

enters step 73 to compare the audio levels in the subsequent frequency range and determine "start" and "stop" time codes for scenes of interest as previously described. Thus those intervals exceeding the audio clip levels for the subsequent frequency range are also recorded in the EDL along with "start" and "stop" codes as described in conjunction with steps 77-84.

[0052] A "yes" condition for test 85 initiates a step 86 in which the tape is moved to the next interval for frequency analysis. A test 87 determines whether or not the last interval has been analyzed. A "no" condition moves the program to entry point C which enters step 72 to set the first frequency range in the next interval, after which the process is continued for identifying scenes of interest in each frequency range and recording the selected scenes in the EDL with their "start" and "stop" codes as per steps 77-83.

[0053] The above process is repeated until the last interval and the last frequency range thereof have been examined for scenes of interest. The scenes are recorded in the EDL for "start" and "stop" codes when appropriate. When the last interval has been analyzed, the test 87 indicates a "yes" condition which initiates a step 88 in which the editor determines the contiguous intervals which will be used in the re-purposing of the selected scenes. A step 89 formats the time intervals for use in manual review of the scenes by the editor after which the process ends.

[0054] Figure 7 shows the EDL for the scenes of interest. Each scene is entered in the EDL with a highlight number, "start" time, and "end" time, which the editor can use to navigate the appropriate portion of the media and view the candidate clip. The editor may choose to modify the parameters and generate alternate lists of candidate clips depending on the acceptability of the suggestions. If the clips are accepted, they may be edited using industry standard audio and video editing techniques for their incorporation in new or modified products to maximize the investment in the intellectual property assets represented by the video clips.

[0055] In summary, a system and method are provided for automatically selecting scenes of interest as visual clips in a media, for example, video, film, sound, etc., using audio cues and signal thresholds. The selected clips may be re-purposed in new, improved or modified products, thereby maximizing the investment return on the intellectual property asset represented by the clips. A method of selecting the scenes involves analyzing the audio track associated with the visual portion of the media for audio levels exceeding thresholds identified for the different frequencies and intervals of the media. These audio cues are used to identify visual clips incorporating scenes of interest. Each clip in which the audio cue has been detected as exceeding a threshold is associated with a "start" and "stop" code. The selected scenes are recorded in an Edit Decision List (EDL) which enables an editor to review the visual clips and re-purpose the clips into new or modified products.

Claims

1. A multimedia system for automatic selection of clips recorded in a media for replay in other contexts, comprising:

means for selecting at least one frequency range for examination;
 means for determining the audio level for a time interval within the at least one selected frequency range;
 means for automatically assessing the determined audio level against at least one selection criterion; and
 means for generating a list of candidate clips based on those time intervals for which the determined audio level satisfies said at least one selection criterion.

2. The multimedia system of claim 1, further comprising:

means for selecting analysis time intervals; and
 means for recording the selected frequency range, determined audio level, and an index for each analysis time interval;
 and wherein said automatic assessment means utilises the recorded frequency range and determined audio level for each analysis time interval.

3. The multimedia system of claim 1 or 2, wherein said at least one selection criterion comprises whether or not the audio level exceeds a clip threshold in a frequency range.

4. The multimedia system of claim 3 further comprising means for setting parameters by frequency range as threshold levels for clips of interest.

5. The multimedia system of any preceding claim, wherein said list of candidate clips comprises an Edit Decision List (EDL), and said system further comprises means for selecting clips from the Edit Decision List for replay.

6. The system of any preceding claim further comprising means for generating a start and end time code for the selected clips in the list of candidate clips.

7. The system of claim 6, wherein said start and end time codes are generated based on a selected preceding and succeeding time interval respectively for an audio clip that satisfies said at least one criterion.

8. The system of claim 7, comprising:

means for subtracting a time P from a time code

for a time interval satisfying said at least one criterion to generate a start time code;
 means for replacing the generated start time code with the start of the media, if the generated value is before the start of the media;
 means for adding a time P to a time code for a time interval satisfying said at least one criterion to generate an end time code; and
 means for replacing the generated end time code with the end of the media, if the generated value is after the end of the media.

9. The system of any preceding claim, further comprising means for modifying the at least one selection criterion for selection of other clips of interest in the media.

10. The system of any preceding claim, wherein said at least one selection criterion involves the logical combination of audio levels from two or more frequency ranges.

11. The method of any preceding claim, further comprising the step of combining time intervals which overlap or are contiguous to form a candidate clip.

12. A multimedia search and indexing system for use in a signal processing system including a signal generator, a processor and memory, for automatic selection of scenes or sounds recorded in a media for replay in other contexts, comprising:

means for analyzing the media for audio levels within a set of frequency ranges;
 means for setting audio clip levels as audio cues for identifying a scene of interest in the media in the set of frequency ranges; and
 means for generating a list of candidate scenes matching the audio cues in the frequency ranges.

13. A method for the automatic selection of multimedia clips recorded in a media for replay in other contexts, comprising the steps of:

selecting at least one frequency range for examination;
 determining the audio level for a time interval within the at least one selected frequency range;
 automatically assessing the determined audio level against at least one selection criterion; and
 generating a list of candidate clips based on those time intervals for which the determined audio level satisfies said at least one selection criterion.

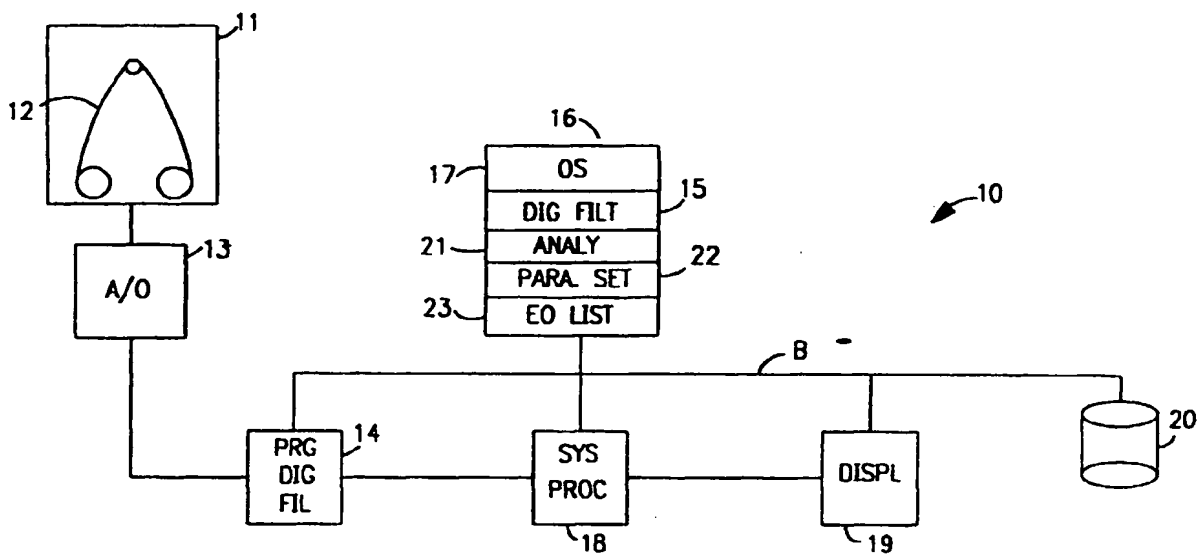


FIG. 1A

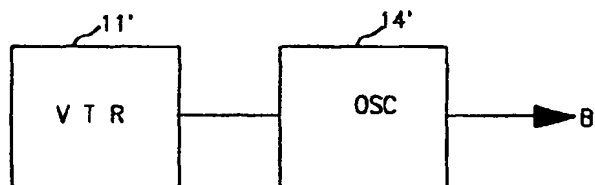


FIG. 1B

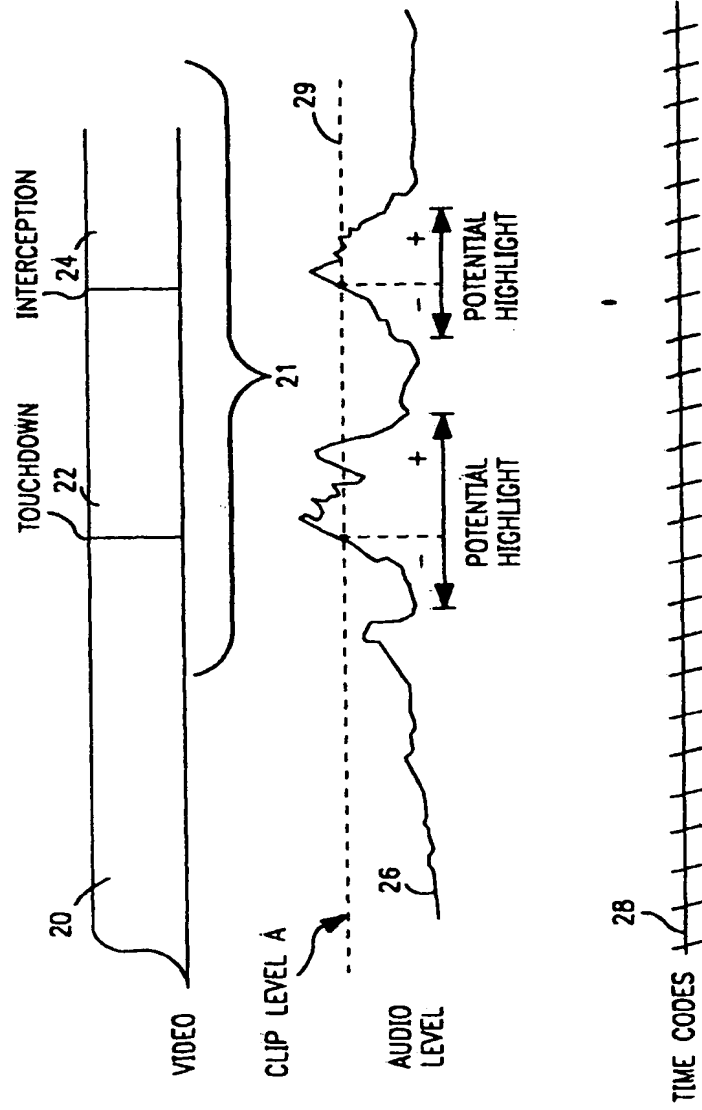


FIG. 2

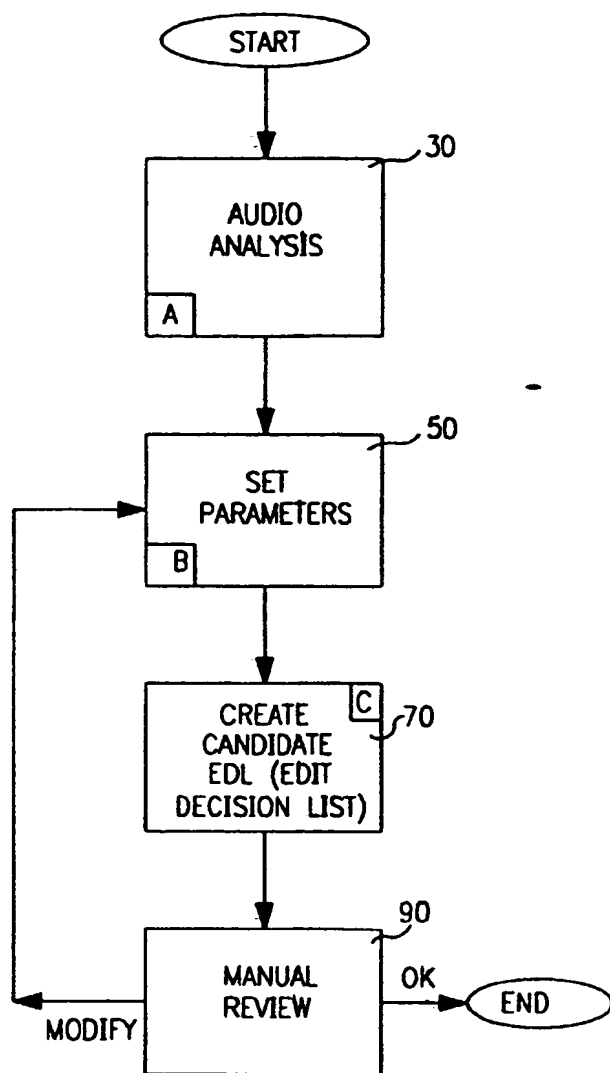


FIG. 3

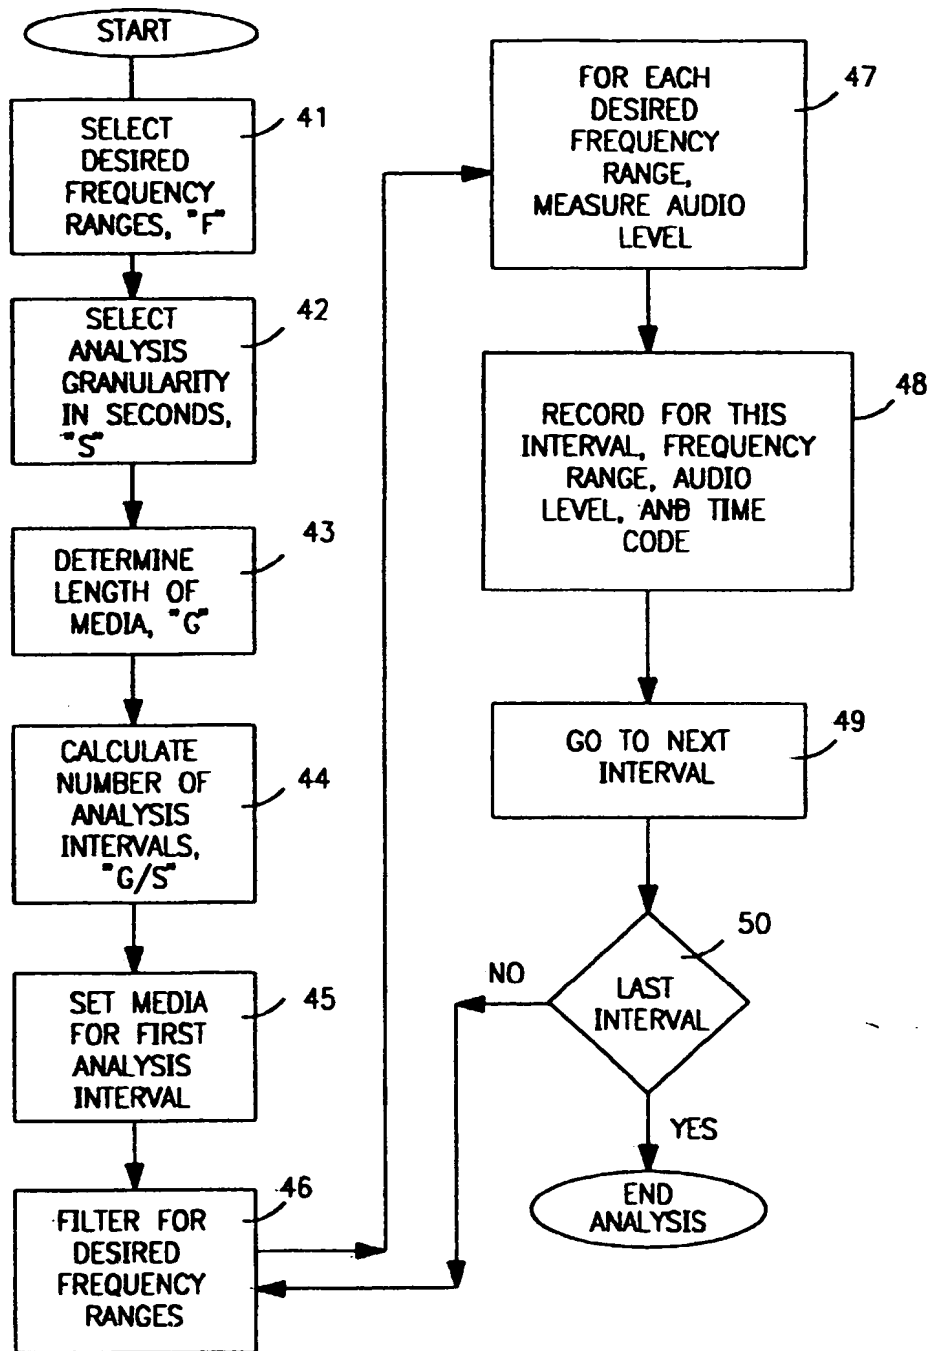


FIG. 4

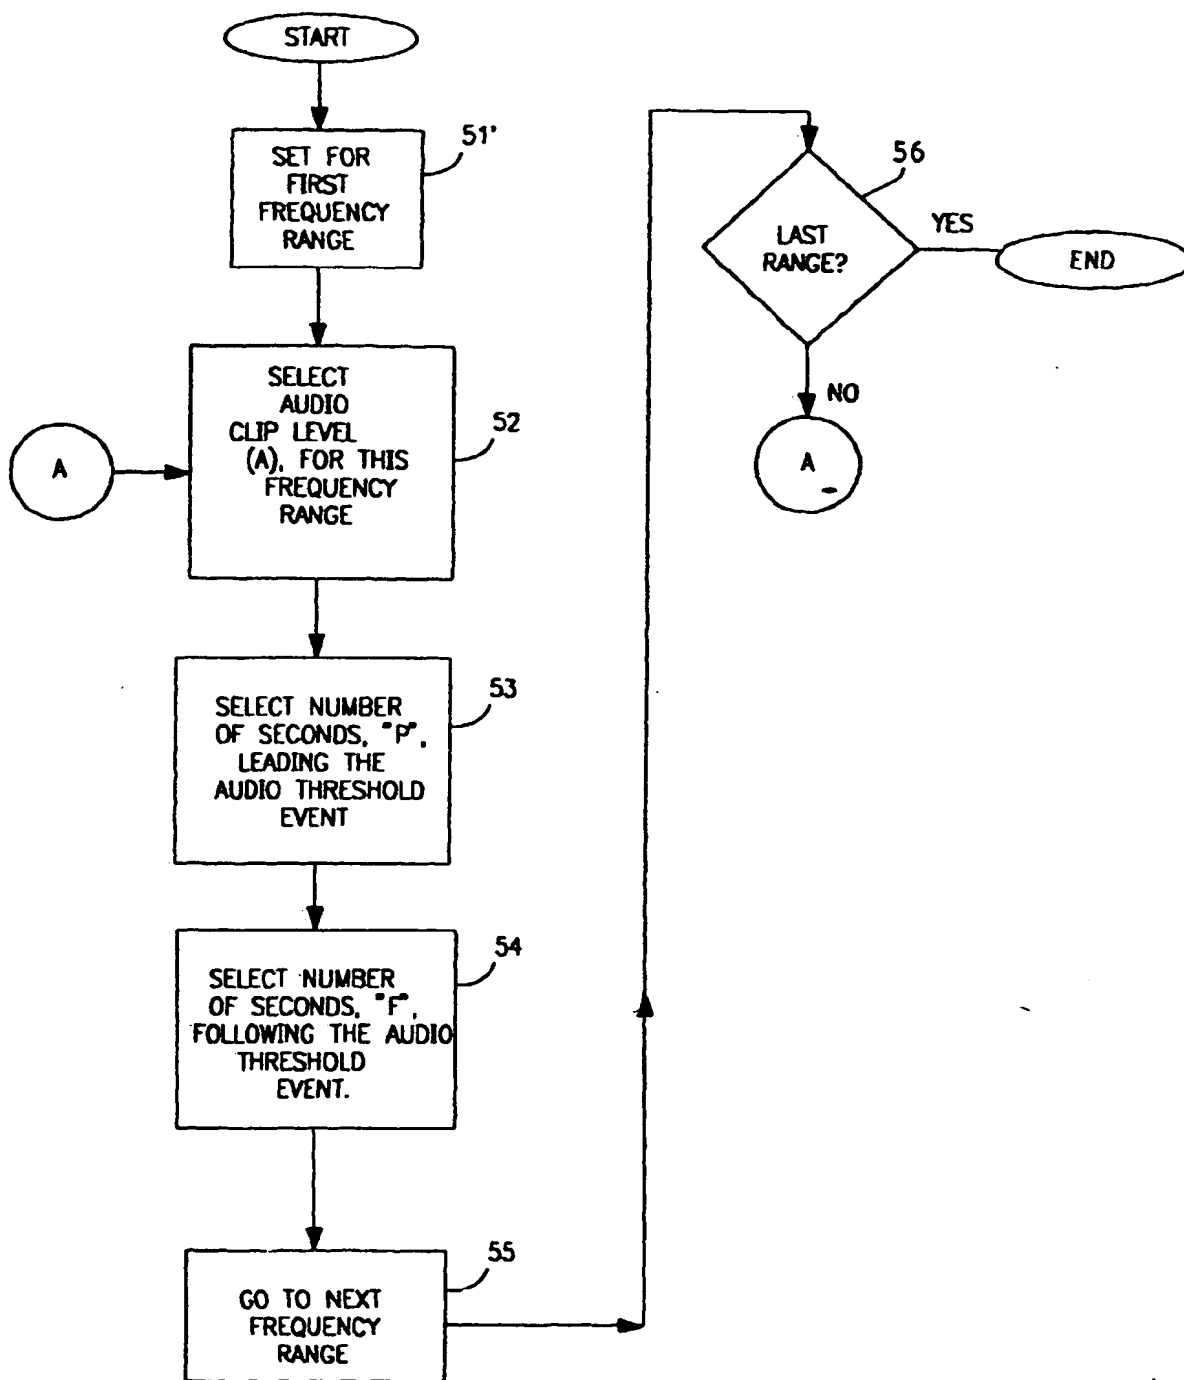


FIG. 5

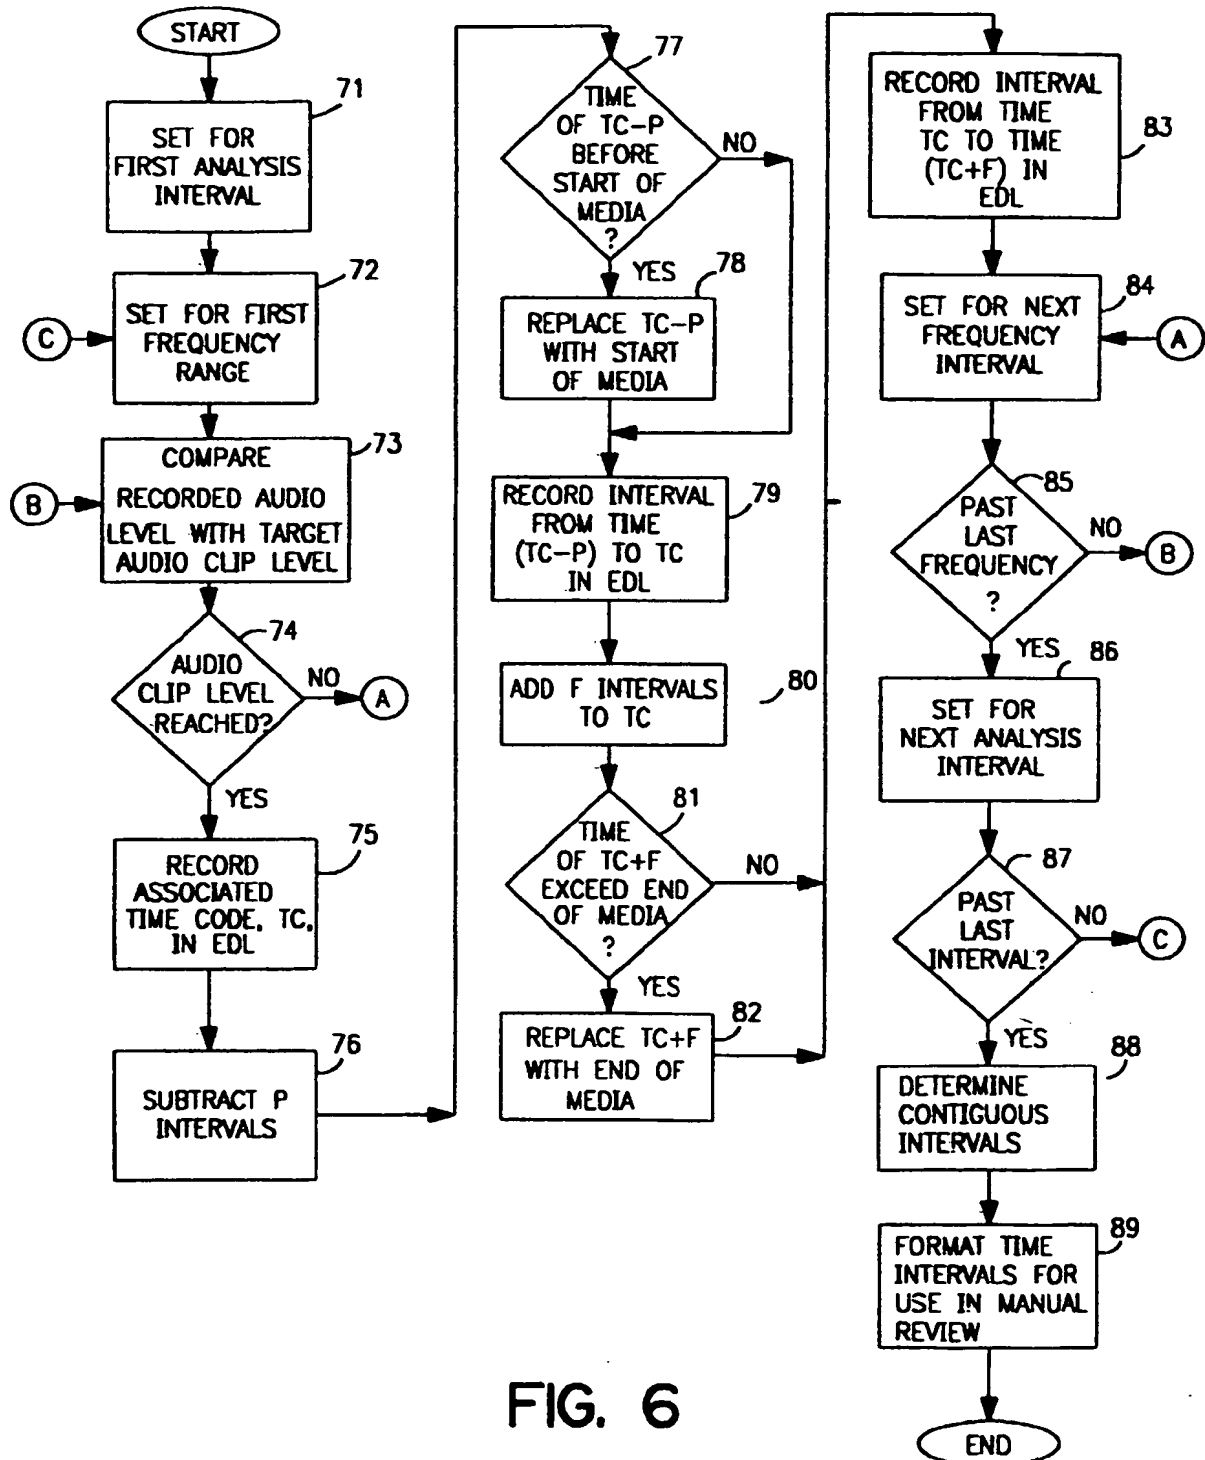


FIG. 6

HIGHLIGHT NUMBER	START TIME	END TIME
1	START TIME 1	END TIME 1
2	START TIME 2	END TIME 2
•	•	•
•	•	•
•	•	•
•	•	•
N	START TIME N	END TIME N

FIG. 7



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
22.01.2003 Bulletin 2003/04

(51) Int Cl.7: **G11B 27/28, H04H 9/00**

(43) Date of publication A2:
05.01.2000 Bulletin 2000/01

(21) Application number: **99305075.6**

(22) Date of filing: **28.06.1999**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
 Designated Extension States:
AL LT LV MK RO SI

- **Stern, Edith H.**
Winchester, Hampshire SO21 2JN (GB)
- **Willner, Barry E.**
Winchester, Hampshire SO21 2JN (GB)

(30) Priority: **30.06.1998 US 107389**

(71) Applicant: **International Business Machines Corporation**
Armonk, NY 10504 (US)

(74) Representative: **Davies, Simon Robert**
IBM,
United Kingdom Limited,
Intellectual Property Law,
Hursley Park
Winchester, Hampshire SO21 2JN (GB)

(72) Inventors:
 • **Lee, Peter S.**
Winchester, Hampshire SO21 2JN (GB)

(54) **Multimedia system and method for automatic clip selection**

(57) A multimedia search and indexing system automatically selects scenes or events of interest from any media, i.e., video, film, sound for replay, in whole or in part, in other contexts. The entire audio track of a recorded event in video, film, sound, etc., is analyzed to determine audio levels within a set of frequency ranges of interest. Audio clip levels within the selected frequency ranges are chosen as audio cues representative of events of interest in the track. The selection criteria are applied to the audio track of the recorded event. An Edit Decision List (EDL) is generated from the analysis of the audio track. The list is representative of scenes or sounds of interest as clips for reuse. The clips are reviewed and accepted or rejected for reuse. Once selected, the clips are edited using industry standard audio and video editing techniques.

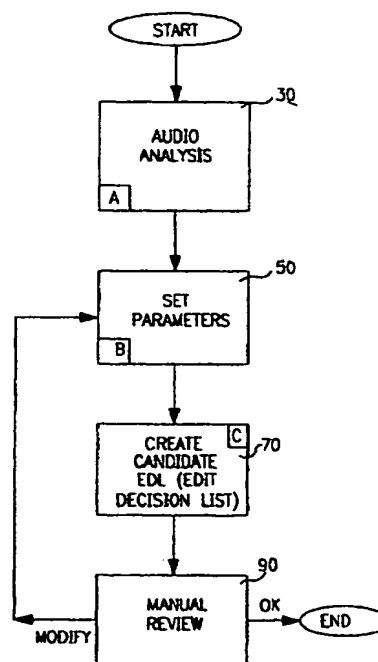


FIG. 3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 5075

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	JP 10 032776 A (MATSUSHITA ELECTRIC IND CO LTD) 3 February 1998 (1998-02-03) -& US 6 160 950 A 12 December 2000 (2000-12-12) * abstract * * column 1, line 1 - column 2, line 23 * * column 3, line 31 - column 9, line 27 * ---	1-13	G11B27/28 H04H9/00
P,A	WO 98 43408 A (KONINKL PHILIPS ELECTRONICS NV; PHILIPS NORDEN AB (SE)) 1 October 1998 (1998-10-01) * the whole document * ---	1-13	
A	US 5 612 729 A (ELLIS MICHAEL D ET AL) 18 March 1997 (1997-03-18) * abstract * * column 8, line 60 - column 11, line 45 * * column 19, line 4 - column 23, line 67 * * figure 8 * ---	1-13	
A	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 07, 31 July 1996 (1996-07-31) & JP 08 079674 A (HITACHI LTD), 22 March 1996 (1996-03-22) * abstract * -----	1,12,13	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G11B H04H G06F
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 18 November 2002	Examiner Sucher, R
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	

EPO FORM 1503 02 02 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 5075

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-11-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 10032776	A	03-02-1998	US 6160950 A	12-12-2000
WO 9843408	A	01-10-1998	EP 0927488 A2	07-07-1999
			WO 9843408 A2	01-10-1998
			JP 2000511743 T	05-09-2000
			KR 2000015857 A	15-03-2000
			US 6347114 B1	12-02-2002
			US 2002126758 A1	12-09-2002
US 5612729	A	18-03-1997	US 5436653 A	25-07-1995
			AU 718227 B2	13-04-2000
			AU 3427297 A	06-11-1997
			AU 678163 B2	22-05-1997
			AU 4226093 A	29-11-1993
			CA 2134748 A1	11-11-1993
			EP 0748563 A1	18-12-1996
			JP 8500471 T	16-01-1996
			WO 9322875 A1	11-11-1993
			US 5504518 A	02-04-1996
			US 5621454 A	15-04-1997
			US 5572246 A	05-11-1996
JP 08079674	A	22-03-1996	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.